

Canopy

Instructions for pitching:

1. Assemble perimeter frame (takes twelve 9' 4" spreaders, 4 corner fittings, and 8 side T fittings). [Put pins through matching holes.]
2. Assemble hip rafters (takes four two-piece 14' 4" hip rafters) and the ridge (takes two 9' 4" spreaders and the green ridge T).
3. Finish frame by installing the two 10'6" rafters at the ends, starting at the top and then at the side T's. [This is the tightest fit.]
4. Unfold top over frame, lace together and strap to frame at the four corners.
5. Lift the 40' side and install the legs (5 legs).
6. Finish strapping top to frame.
7. Lift opposite side and install all legs (7 more legs).
8. Stake tent down with stakes approximately 3' out from tent.

Parts List:

- 4 Corner fittings
- 8 Side T fittings
- 1 Top T fitting (green ridge T)
- 2 6-way crowns
- 12 6' 10" legs with 12 leg buckets
- 14 9' 4" spreaders
- 8 10' 6" rafters
- 4 14' 4" hip rafters (Hip rafters are two-piece. Keep matching colors together.)

Instructions for lacing:


1. Lay tent sections on ground with center pole holes overlapping.
2. Starting at ridge, push first loop up through corresponding grommet.
3. Push 2nd loop up through grommet and through the first loop. Proceed to individually pull each loop through its corresponding grommet and through the preceding loop. Thus, creating the lace effect.
4. Continue process and tie off the last longer loop at the side pole hole.
5. Now do opposite side, pushing loops down through grommets.
6. Finally, cover lacing with the protective flap & snap it down to the rings provided.

Congratulations, you did it! (Larry Campbell)




1795 N. Hercules Ave. • Clearwater, FL 33765 • TEL: (727) 445-9726 • FAX: (727) 461-2951 • <http://www.srtproducts.com>

WELDED STEEL FITTINGS DESIGNED FOR YEARS OF DURABILITY





TEE JOINT



8 WAY CROWN



HALF CROWN

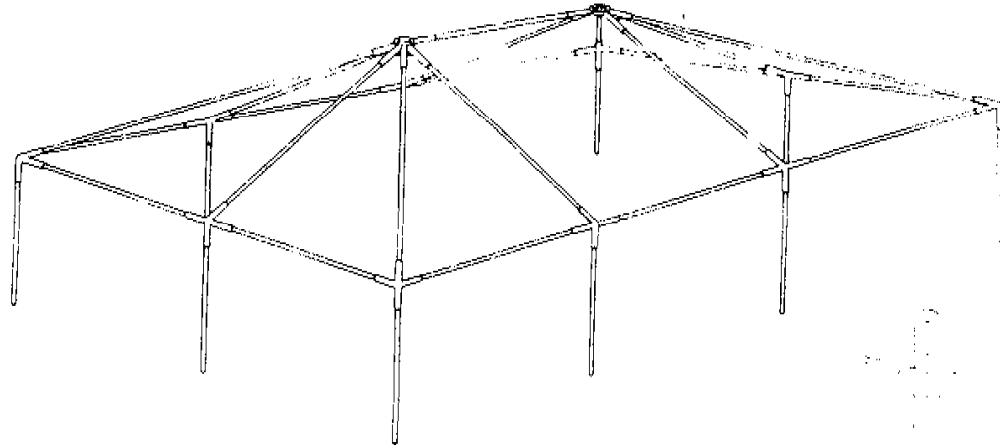

4 WAY CROWN



CORNER


INTERCHANGEABLE FITTINGS for party tents can be used on "VARIOUS FRAME SIZES" which will ELIMINATE ADDITIONAL EXPENSES when you expand your inventory.

ALL CANOPIES COME WITH EASY TO FOLLOW INSTRUCTION SHEETS.
PIPES ARE COLOR CODED FOR EASY ASSEMBLY.

SIZES AVAILABLE

7' x 7'	15' x 15'	30' x 50'
8' x 8'	20' x 20'	30' x 60'
8' x 12'	20' x 30'	40' x 40'
10' x 10'	30' x 30'	40' x 50'
12' x 12'	30' x 40'	40' x 60'



CUSTOM SIZES AVAILABLE

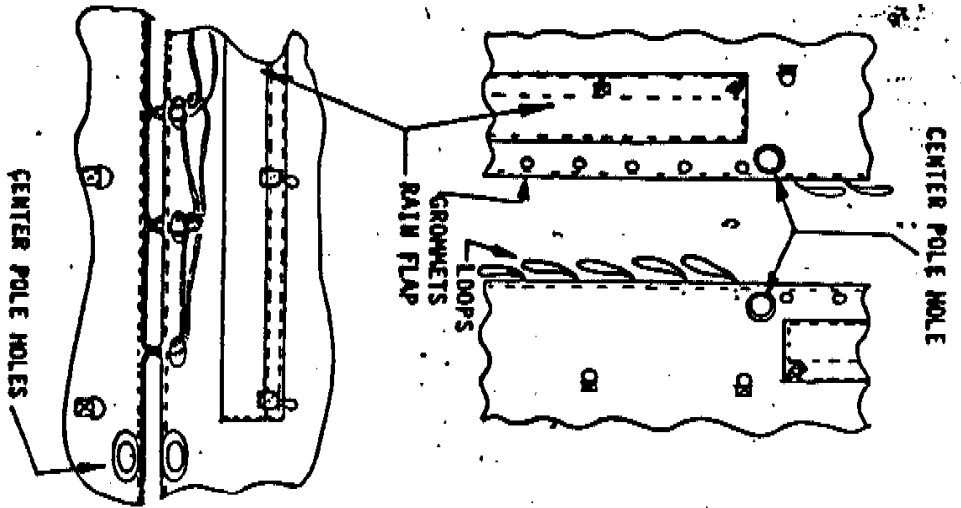

LACING INSTRUCTIONS

1. LAY TENT SECTIONS ON GROUND WITH CENTER POLE HOLES OVERLAPPING.
2. STAKING AT RIDGE, PUSH FIRST LOOP UP THROUGH CORRESPONDING GROWNET.
3. PUSH 2ND LOOP UP THROUGH GROWNET AND THROUGH THE FIRST LOOP. PROCEED TO INDIVIDUALLY PULL EACH LOOP THROUGH IT'S CORRESPONDING GROWNET AND THROUGH THE PRECEDING LOOP. THIS CREATING THE LACE EFFECT.
4. CONTINUE PROCESS AND TIE OFF THE LAST LONGER LOOP AT THE SIDE POLE HOLE.
5. NOW DO OPPOSITE SIDE PUSHING LOOPS DOWN THROUGH GROWNETS.
6. FINALLY COVER LACING WITH THE PROTECTIVE FLAP & SNAP IT DOWN TO THE RINGS PROVIDED.

TYPICAL PUSH POLE TENT LAY OUT

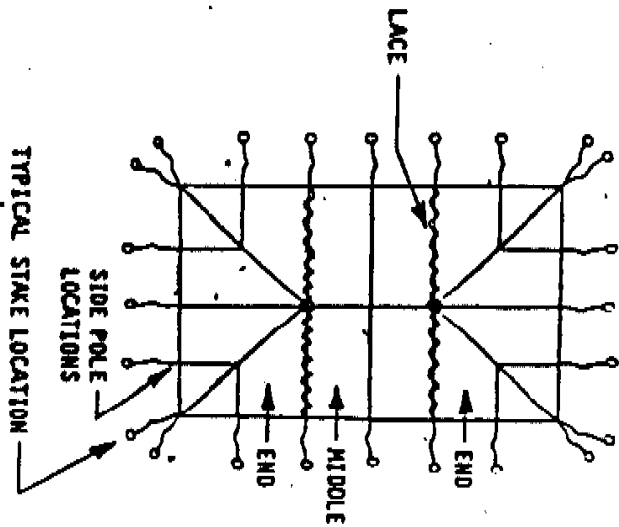


- 1) ^{Put} Frame together w/o legs
- 2) Put top on
- 3) Put legs on
- 4) Secure of guylines
put buckets as close to legs as possible

8-4-30


Bring Hammer
Call First Pam

Go Down to Belcher Go R to Calum
Go L to end
Before Here

FRAME TENTS

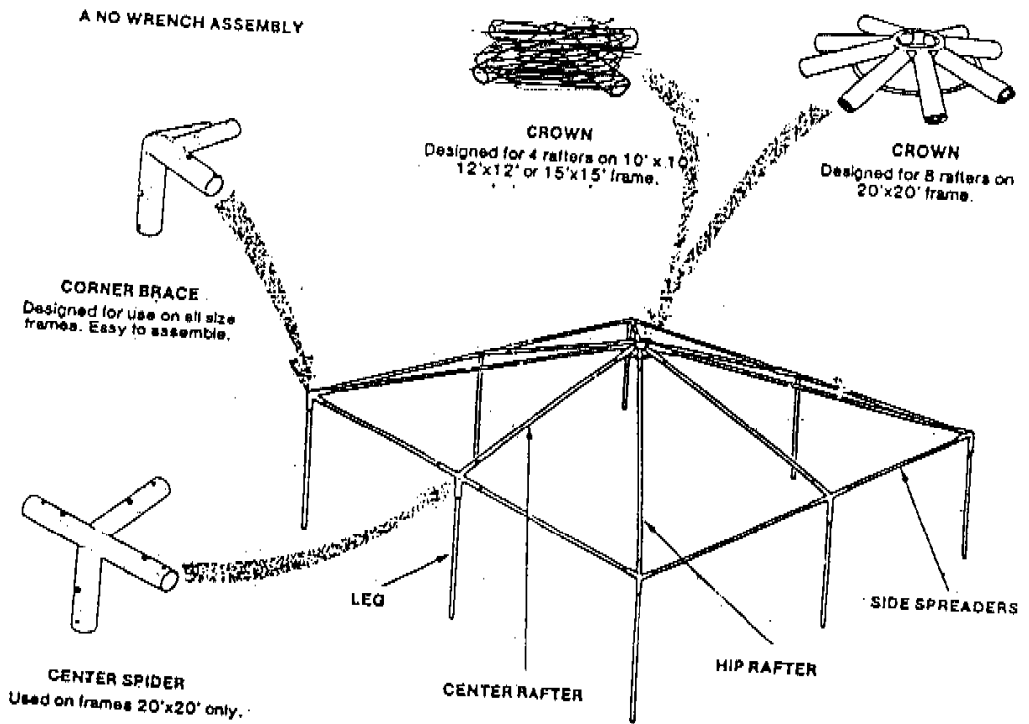

Assemble perimeter first. Then Hip Rafters + Ridge. Finish frame by installing Rafters (10'6") starting at the top and then at the side T's. unfold top over frame, lace together + strap to frame. lift 40' side and install legs. Finish strapping top to frame. lift 40' side at the four corners. Lift 40' side with strakes space 3' out from tent. Side and install all legs. STAKE 20' x 40' FRAME

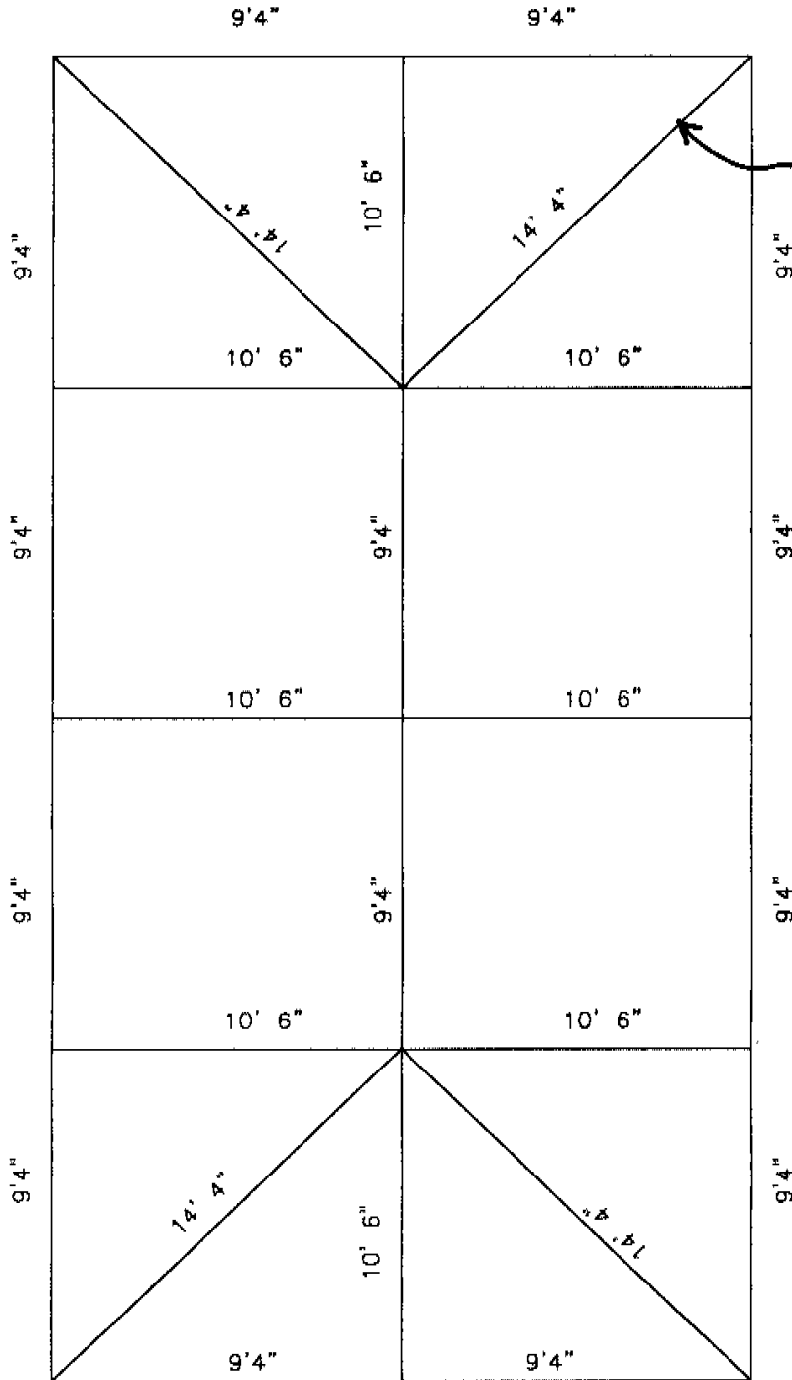

NOTE: Your Hip Rafters are two pc. keep matching colors together.

PARTS LIST:	
4- CORNER FITTINGS	12- 6' 10" LEGS
8- SIDE "T" FITTINGS	14- 9' 4" SPREADERS
1- TOP "T" FITTING	8- 10' 6" RAFTERS
2- 6-WAY CROWNS	4- 14' 4" HIP RAFTERS

SRT PRODUCTS, INC. (800) 554-TENT